



TYPE "240S" NEOPRENE ISOLATOR

ISOLATOR TYPE	COLOR	RATED LOAD	RATED DEFL.
240S { 2 3 4	GREEN	700 #	0.25"
	BLUE	1100 #	0.25"
	ORANGE	1800 #	0.25"

NOTE: ISOLATORS ARE DESIGNED FOR STATIC LOADS ONLY WITH NO LEVELING DEVICES.

INSTALLATION INSTRUCTION

1. PLACE ISOLATORS UNDER EQUIPMENT AT POINTS OF SUPPORT.
2. BOLT ISOLATORS TO EQUIPMENT.
3. SHIM ISOLATORS TO LEVEL EQUIPMENT.

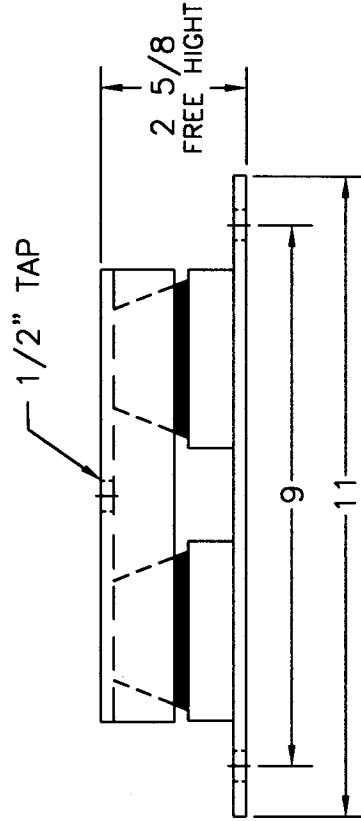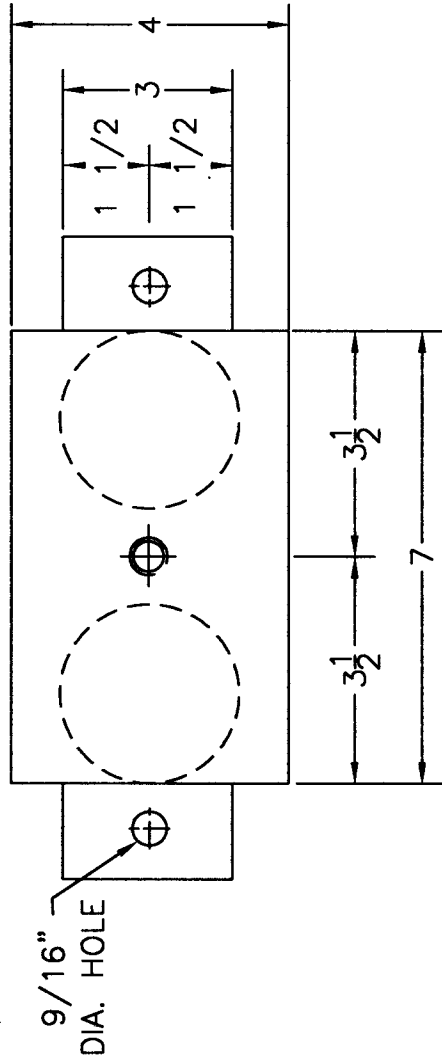

VIBRATION ELIMINATOR CO. INC.
15 Dixon Avenue
Copiague, NY 11726
TEL. (631)841-4000 FAX (631)841-0020

JOB : _____
CONTRACTOR : _____
P.O. NO. : _____

Dwg. No.