


"400NP" NEOPRENE PAD WITH STEEL TOP PLATE

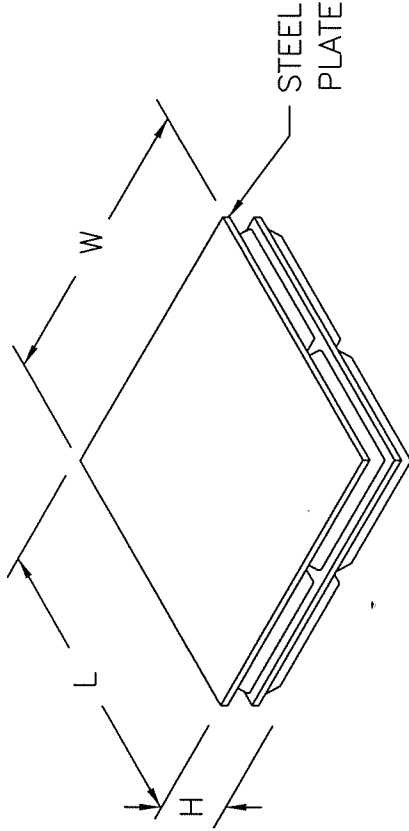


PAD SIZE	LOAD CAPACITY	DEFL.
3" x 3" x 1"	405 #	.11"
6" x 6" x 1"	1620 #	.11"
9" x 9" x 1 1/8"	3645 #	.11"
12" x 12" x 1 1/8"	6480 #	.11"
15" x 15" x 1 1/4"	10,125 #	.11"
18" x 18" x 1 1/4"	14,580 #	.11"

When the pad size required is larger than the equipment support, a steel distribution plate must be bonded to the "400N" pad. For the addition of this plate add the letter "P".

"400N" is a 3/4" thick pad, designed to support a recommended load of 45 pounds per square inch. This load deflects the isolation pad 0.11 inches and is equivalent to 15% of the pad's height.

JOB : _____
 CONTRACTOR : _____
 P.O. NO. : _____



VIBRATION ELIMINATOR CO. INC.
 15 Dixon Avenue
 Copiague, NY 11726
 PH. (631) 841-4000 FAX (631) 841-0020

Dwg. No.:

PAD400NPE-E.DWG.