




Vibration Eliminator

Co., Inc.

STAINLESS STEEL CONNECTORS W/ CARBON STEEL FITTINGS

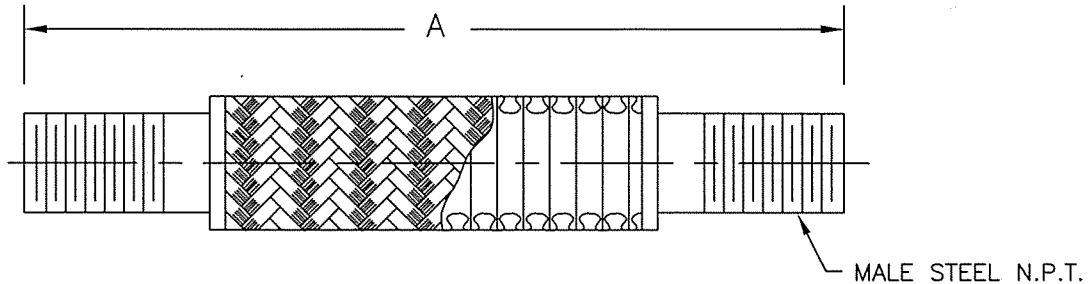

NOTES:

1. 1/8" MAXIMUM OFFSET MOTION.
2. LONGER LENGTHS AVAILABLE UPON REQUEST.

STAINLESS STEEL CONNECTOR:

STAINLESS STEEL CORRUGATED TUBING
STAINLESS BRAID
CARBON STEEL FITTINGS

BRONZE CONNECTOR:

CORRUGATED TIN BRONZE TUBING
CARBON STEEL OR COPPER FITTINGS

PIPE SIZE	A	WORKING PRESSURE @ 70°F		PARALLEL OFFSET (IN)	
		BRONZE	S.S.	PERMANENT	INTERMITTENT
1/2"	8 1/2"	525	1125	1	1/4
3/4"	10"	450	760	1 5/8	3/8
1"	10"	375	525	1	1/4
1 1/4"	11"	300	490	1 1/2	1/2
1 1/2"	12"	300	450	1 3/4	5/8
2"	12"	200	400	1 3/8	1/2
2 1/2"	16"	125	285	2	3/4
3"	18"	125	240	2	1
4"	20"	120	200	2 1/4	1 1/8

FOR SAFE WORKING PRESSURE ABOVE 70°F, MULTIPLY PRESSURE SHOWN AT 70°F TIMES CORRECTION FACTOR OF REQUIRED TEMPERATURE.

FOR TEMPERATURE ABOVE 70°F	
TEMP. °F	FACTOR
70	1.00
200	.86
300	.80
400	.78
500	.77
600	.77

MATERIAL SPEC.

PIPE ENDS: SCHEDULE 40 IPS SCHEDULE 80 IPS
HOSE: BRONZE STAINLESS STEEL
BRAID: BRONZE STAINLESS STEEL

VIBRATION ELIMINATOR CO., INC. ■ 15 Dixon Avenue ■ Copiague, New York 11726
Tel. (631) 841-4000 Fax (631) 841-0020