


# TYPE "70N-NEOSORB" HEAVY DUTY NEOPRENE PAD

MODEL NUMBER	PAD SIZE	LOAD CAPACITY
70N-NEOSORB	2" x 2" x 1/2"	400 #
	3" x 3" x 1/2"	900 #
	4" x 4" x 1/2"	1,600 #
	5" x 5" x 1/2"	2,500 #
	6" x 6" x 1/2"	3,600 #
	8" x 8" x 1/2"	6,400 #

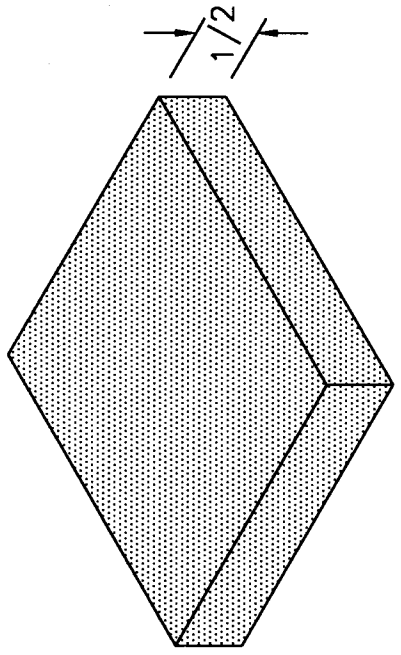

"70N" isolators consist of the highest quality neoprene molded to specifications establishing shape factors which control the load deflection characteristics for the mounts. The rubber is sandwiched between two steel plates.

"70N" mounts may be any desired dimensions and/or load capacity. Selection and distribution of the inserts should be made in cooperation with our engineering department to assure best results for each application. Some typical applications of "70N" mounts include the support of punch presses to 3000 ton capacity, centrifugal refrigeration compressors, building columns, diesel engine generators, pipe risers, injection molders and numerous others. Each case is given individual attention and recommendations are accompanied by drawings illustrating correct applications.

PAD70N.DWG.



**VIBRATION ELIMINATOR CO. INC.**  
 15 Dixon Avenue  
 Copiague, NY 11726  
 TEL. (631)841-4000 FAX (631)841-0020

JOB : \_\_\_\_\_

CONTRACTOR : \_\_\_\_\_

P.O. NO. : \_\_\_\_\_

Dwg. No. \_\_\_\_\_